



GF4C

Rotary limit switch



Rotary limit switch used to control and measure the movement of industrial machines or the position of the nacelle or pitch angle of wind turbines.

FEATURES

- It consists of a gear motor that transfers movement to the cams and the other movement detection devices through a primary input reduction stage (worm gear and helical toothed gear) and one or more secondary output stages.
- Accurate adjustment of cams by means of screws.
- Positive opening NC contacts for safety functions.
- Mechanical life of switches: up to 1 million operations.
- IP protection degree: GF4C is classified IP 65.
- Extreme temperature resistance: -25°C to +70°C.
- It features transmission and gear driving shafts made of stainless steel, self-lubricating technopolymer gears and driving bushes and sintered bronze bushes moulded into the base of the limit switch to prevent rubbing against plastic material.
- All materials and components used are wear resistant and guarantee protection of the unit against water and dust.

OPTIONS

- Revolution ratios from 1:1 to 1:969, achieved by combining different secondary output stages.
- Each of the two outputs can be set to a different revolution ratio to enable diversified control of the machine when special requirements need to be met.
- Snap actions switches with 1NO+1NC contacts or slow action switches with 1NC contact.
- It can be equipped with 2 cam sets (with up to 7 switches), potentiometers and encoders (alone or on top of cam sets with up to 2 switches) and Yankee absolute encoders (on top of cam sets with up to 2 switches).
- Available with flanges, pinion gears and couplings.
- Available with direct control switches to enable direct action on the motor.

CERTIFICATIONS

- CE marking and cULus* marking.

Fill in the "request form" for accurate product configuration.



CERTIFICATIONS

| | |
|------------------------------------|---|
| Conformity to Community Directives | 2014/35/UE Low Voltage Directive 2006/42/CE Machinery Directive |
| | EN 60204-1 Safety of machinery - Electrical equipment of machines EN 60947-1 Low-voltage switchgear and controlgear |
| Conformity to CE Standards | EN 60947-5-1 Low-voltage switchgear and controlgear - Control circuit devices and switching elements - Electromechanical control circuit devices EN 60529 Degrees of protection provided by enclosures |
| Conformity to cULus Standards | CSA-C22.2 No 14-13 Industrial Control Equipment UL 508 Industrial Control Equipment |
| Markings and homologations | CE cULus * |

GENERAL TECHNICAL SPECIFICATIONS


| | |
|----------------------|--|
| Ambient temperature | Storage -40°C/+70°C Operational -25°C/+70°C |
| IP protection degree | IP 65 |
| Insulation category | Class II |
| Cable entry | Cable gland M20 |
| Shafts | Stainless steel AISI 303 |

TECHNICAL SPECIFICATIONS OF THE SWITCHES FOR AUXILIARY CONTROL

| Code | PRSL0036XX | PRSL0037XX |
|----------------------------|--|---|
| Utilisation category | AC 15 | |
| Rated operational voltage | 3 A | |
| Rated operational current | 250 Vac | |
| Rated thermal current | 10 A | |
| Rated insulation voltage | 300 Vac | |
| Mechanical life | 1x10 ⁶ operations | |
| Connections | Screw-type terminals | |
| Wires | 1x2,5 mm ² , 2x1,5 mm ² (UL (c)UL: use 60°C or 75°C copper (CU) conductors and wire 16-18 AWG) | |
| Tightening torque | 0,8 Nm | |
| Switch type | Double break, snap action | Double break, slow action |
| Contacts | 1NO+1NC (All NC contacts are of the positive opening operation type →) | 1NC (All NC contacts are of the positive opening operation type →) |
| Scheme |  |  |
| Markings and homologations | CE cULus * | |

* Not available on all versions.



| | | |
|-----------------------------------|--|---|
| Code | PRSL0110XX | PRSL0111XX |
| Utilisation category | AC 15 | |
| Rated operational voltage | 250 Vac | |
| Rated operational current | 3 A | |
| Rated thermal current | 10 A | |
| Rated insulation voltage | 300 Vac | |
| Mechanical life | 10x10 ⁶ operations | |
| Connections | Screw-type terminals | |
| Wires | 1x2.5 mm ² , 2x1.5 mm ² (UL (c)UL: use 60°C or 75°C copper (CU) conductors and stiff or flexible wire 14-22 AWG) | |
| Tightening torque | 0.5 Nm | |
| Switch type | Double break, snap action | Double break, slow action |
| Contacts | 1NO+1NC (All NC contacts are of the positive opening operation type →) | 1NC (All NC contacts are of the positive opening operation type →) |
| Scheme |  |  |
| Markings and homologations |   | |

TECHNICAL SPECIFICATIONS OF THE SWITCHES FOR DIRECT CONTROL

| | |
|-----------------------------------|---|
| Code | PRSL0455PI |
| Utilisation category | AC 3 |
| Rated operational current | 400 Vac |
| Rated operational voltage | 10 A |
| Rated thermal current | 20 A |
| Rated insulation voltage | 660 Vac |
| Mechanical life | 1x10 ⁶ operations |
| Connections | Screw-type terminals |
| Wires | 2x1.5 mm ² , 1x2.5 mm ² |
| Tightening torque | 0.8 Nm |
| Switch type | Two-pole |
| Contacts | 2NC |
| Scheme |  |
| Markings and homologations |  |

TECHNICAL SPECIFICATIONS OF THE POTENTIOMETERS

| Code of potentiometer with support | PA020001 | PA020002 |
|------------------------------------|----------|------------------------------|
| Ohmic value | 10 kΩ | 10 kΩ mechanical stop |
| Resolution | | Infinite |
| Independant linearity | | ±1% |
| Life time | | 10x10 ⁶ movements |
| Operational ambient temperature | | -55°C/+105°C |
| Continuos rotation (without stop) | | 360° |
| Continuos rotation (with stop) | | 333° ±5° |
| Actual electrical angle | | 310° ±5° |
| Ohmic value tolerance | | ±20% |

| Code of potentiometer with support | PA020006 | PA020007 | PA020008 |
|--------------------------------------|----------|-----------------------------|----------|
| Ohmic value | 4.7 kΩ | 10 kΩ | 2.2 kΩ |
| Independant linearity (ref. AEA -3°) | | ±0,25% | |
| Life time | | 3x10 ⁶ movements | |
| Operational ambient temperature | | -55°C/+125°C | |
| Mechanical angle | | 360° continuous | |
| Actual Electrical Angle (AEA) | | 355° ±5° | |
| Ohmic value tolerance | | ±5% | |
| Temperature drift | | < 50 PPM/°C | |

| Code of potentiometer with support | PA020003 | PA020004 | PA020005 |
|--------------------------------------|-------------------|-----------------------------|------------------|
| Ohmic value | 10 kΩ | 10 kΩ | 5 kΩ |
| Connections | 4 turrets | 3 turrets | 4 turrets |
| Indipendent linearity (over AEA -3°) | ≤ ±1% | ≤ ±0.35% | ≤ ±1% |
| Life time | | 5x10 ⁶ movements | |
| Operational ambient temperature | | -55°C/+125°C | |
| Mechanical angle | | 360° continuous | |
| Actual Electrical Angle (AEA) | | 340°±5° | |
| Ohmic value tolerance | Max ± 20% at 20°C | Max ±10% at 20°C | Max ±20% at 20°C |

| Code of potentiometer with support | PA020009 |
|------------------------------------|-------------------------------|
| Ohmic value | 2 kΩ |
| Resolution | Better then 0.008° |
| Linearity | ±0.075% |
| Independant linearity | ±0.075% |
| Life time | 100x10 ⁶ movements |
| Operational ambient temperature | -40°C/+100°C |
| Mechanical angle | 360° continuous |
| Actual electrical travel | 350° ±2° |
| Ohmic value tolerance | ±20% |

TECHNICAL SPECIFICATIONS OF THE ENCODERS

| | | |
|---------------------------------|--|-----------------|
| Code with support | PA030001 | PA030002 |
| Resolution | 36 pulses/rev. | 150 pulses/rev. |
| Operational ambient temperature | -40°C/+85°C | |
| Code | Incremental | |
| Supply voltage | 4.5 Vdc min. to 30 Vdc max. (35 mA max. - no load) | |
| Output voltage | Low: 500 mV max. at 10 mA High: (Vin - 0.6) at -10 mA (Vin - 1.3) at -25 mA | |
| Output current | 25 mA max. load per output channel | |
| Output format | Two channel (A, B) quadrature with Index (Z) | |
| Phase sense | A leads B clockwise (CW) from the mounting end of the encoder | |
| Accuracy | ±0.8 arc-min. | |
| Outputs | Push pull | |
| Electrical protection | Protection against reverse polarity and output short-circuit | |

CERTIFICATIONS OF THE ABSOLUTE ENCODER YANKEE

| | |
|------------------------------------|---|
| Conformity to Community Directives | 2014/30/UE Electromagnetic Compatibility (EMC) Directive 2006/42/CE Machinery Directive 2014/35/UE Low Voltage Directive (LVD) |
| Conformity to CE Standards | EN 61326-1 Electrical equipment for measurement, control and laboratory use - EMC requirements EN 60529 Degrees of protection provided by enclosures |
| Conformity to cULus Standards | CSA-C22.2 No 14-13 Industrial Control Equipment UL 508 Industrial Control Equipment |
| Markings and homologations | CE cULus |

GENERAL TECHNICAL SPECIFICATIONS OF THE ABSOLUTE ENCODER YANKEE





| | |
|------------------------|--|
| Ambient temperature | Storage -40°C/+80°C Operational -40°C/+80°C |
| IP protection degree | IP 20 |
| Free rotation | 360° |
| Maximum rotation speed | 800 rpm |

ELECTRICAL SPECIFICATIONS OF THE ABSOLUTE ENCODER YANKEE





| Code | PA01AA01 / PA02AA01 | PA01AB01 | PA01AC01 |
|-------------------------------------|---------------------|--------------------------------|---------------|
| Analog output | Current 4 ÷ 20 mA | Voltage 0 ÷ 10 V | PWM 0 ÷ 100 % |
| Power supply | | 12 ÷ 48 Vdc/12 ÷ 48 Vac | |
| Protection against reverse polarity | | Yes | |
| Absorption | | 50 mA | |
| Resolution | | 10 bit | |
| Linearity | | ±0.5° | |
| Max. hysteresis | | 0.1° | |
| Zero Point setting | | Through button/wire | |
| Signal increment direction | | CW (standard)/CCW (on request) | |
| Connections | | Terminal board | |
| Terminal wires | | 0.14 mm² - 1.5 mm² | |
| Terminal tightening torque | | 0.22 Nm - 0.25 Nm | |

OVERALL DIMENSIONS (mm)

Standard

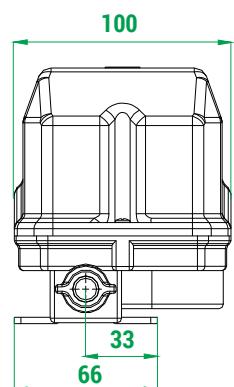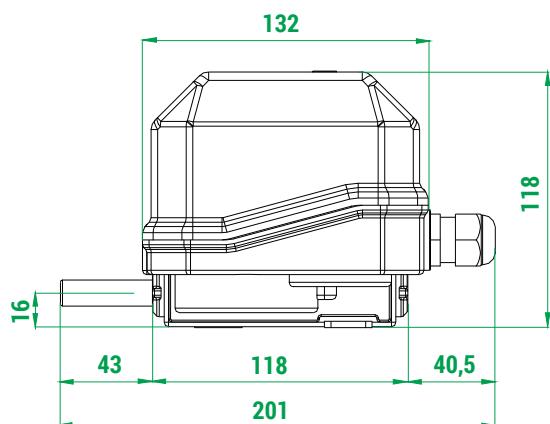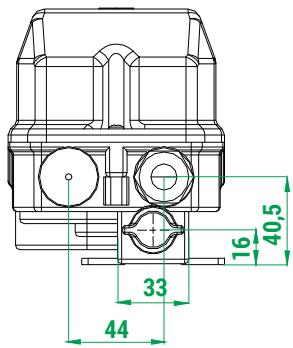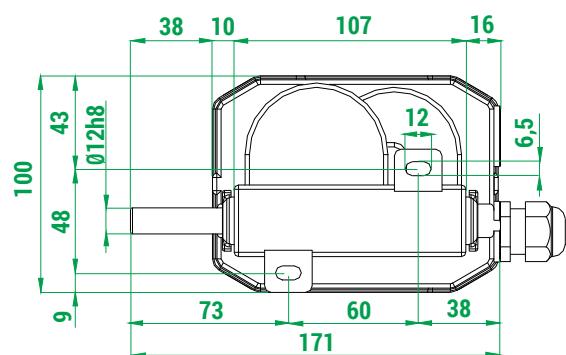

With flange

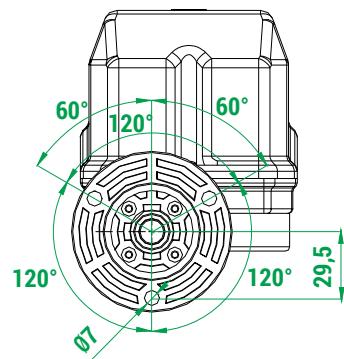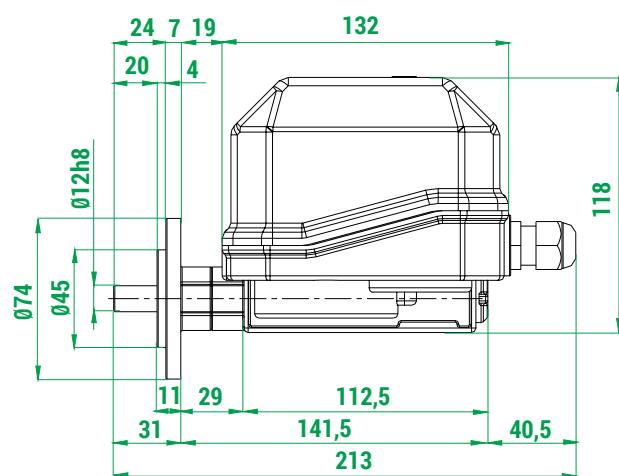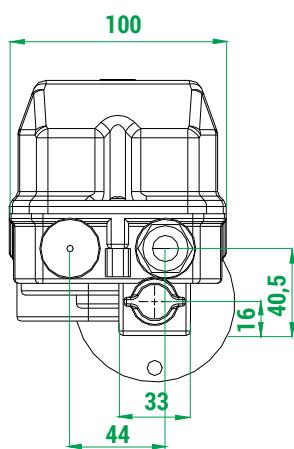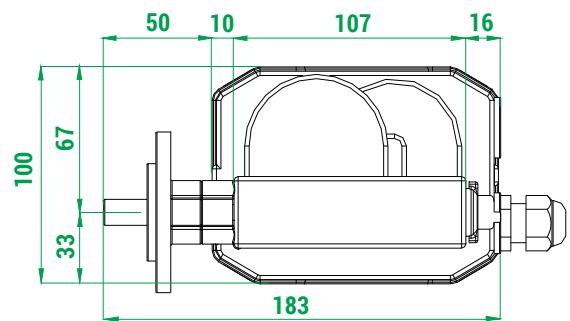


STANDARD LIMIT SWITCHES

Standard limit switches are equipped with cams PRSL7140PI .


| Rated revolution ratio | No. of cams and switches | Switches | |
|------------------------|--------------------------|---|---|
| | | PRSL0036XX 1NO+1NC | PRSL0037XX 1NC |
| | |  |  |
| Code | Code | | |
| 1:1 | 2 | PF090300010003 | PF090300010004 |
| | 3 | PF090300010002 | PF090300010005 |
| | 4 | PF090300010001 | PF090300010006 |
| 1:5 | 2 | PF090300050002 | PF090300050004 |
| | 3 | PF090300050003 | PF090300050005 |
| | 4 | PF090300050001 | PF090300050006 |
| 1:10 | 2 | PF090300100003 | PF090300100005 |
| | 3 | PF090300100004 | PF090300100006 |
| | 4 | PF090300100002 | PF090300100007 |
| 1:15 | 2 | PF090300150004 | PF090300150007 |
| | 3 | PF090300150003 | PF090300150008 |
| | 4 | PF090300150002 | PF090300150001 |
| 1:20 | 2 | PF090300200002 | PF090300200004 |
| | 3 | PF090300200003 | PF090300200005 |
| | 4 | PF090300200001 | PF090300200006 |
| 1:25 | 2 | PF090300250006 | PF090300250007 |
| | 3 | PF090300250003 | PF090300250008 |
| | 4 | PF090300250001 | PF090300250002 |
| 1:50 | 2 | PF090300500002 | PF090300500028 |
| | 3 | PF090300500003 | PF090300500017 |
| | 4 | PF090300500006 | PF090300500007 |
| 1:75 | 2 | PF090300750007 | PF090300750009 |
| | 3 | PF090300750008 | PF090300750010 |
| | 4 | PF090300750004 | PF090300750006 |
| 1:100 | 2 | PF090301000002 | PF090301000001 |
| | 3 | PF090301000006 | PF090301000013 |
| | 4 | PF090301000003 | PF090301000004 |
| 1:150 | 2 | PF090301500002 | PF090301500001 |
| | 3 | PF090301500011 | PF090301500009 |
| | 4 | PF090301500008 | PF090301500003 |
| 1:200 | 2 | PF090302000006 | PF090302000007 |
| | 3 | PF090302000002 | PF090302000004 |
| | 4 | PF090302000003 | PF090302000008 |
| 1:250 | 2 | PF090302500003 | PF090302500009 |
| | 3 | PF090302500007 | PF090302500010 |
| | 4 | PF090302500008 | PF090302500011 |
| 1:300 | 2 | PF090303000004 | PF090303000008 |
| | 3 | PF090303000006 | PF090303000009 |
| | 4 | PF090303000007 | PF090303000010 |

ASSEMBLY DRAWING

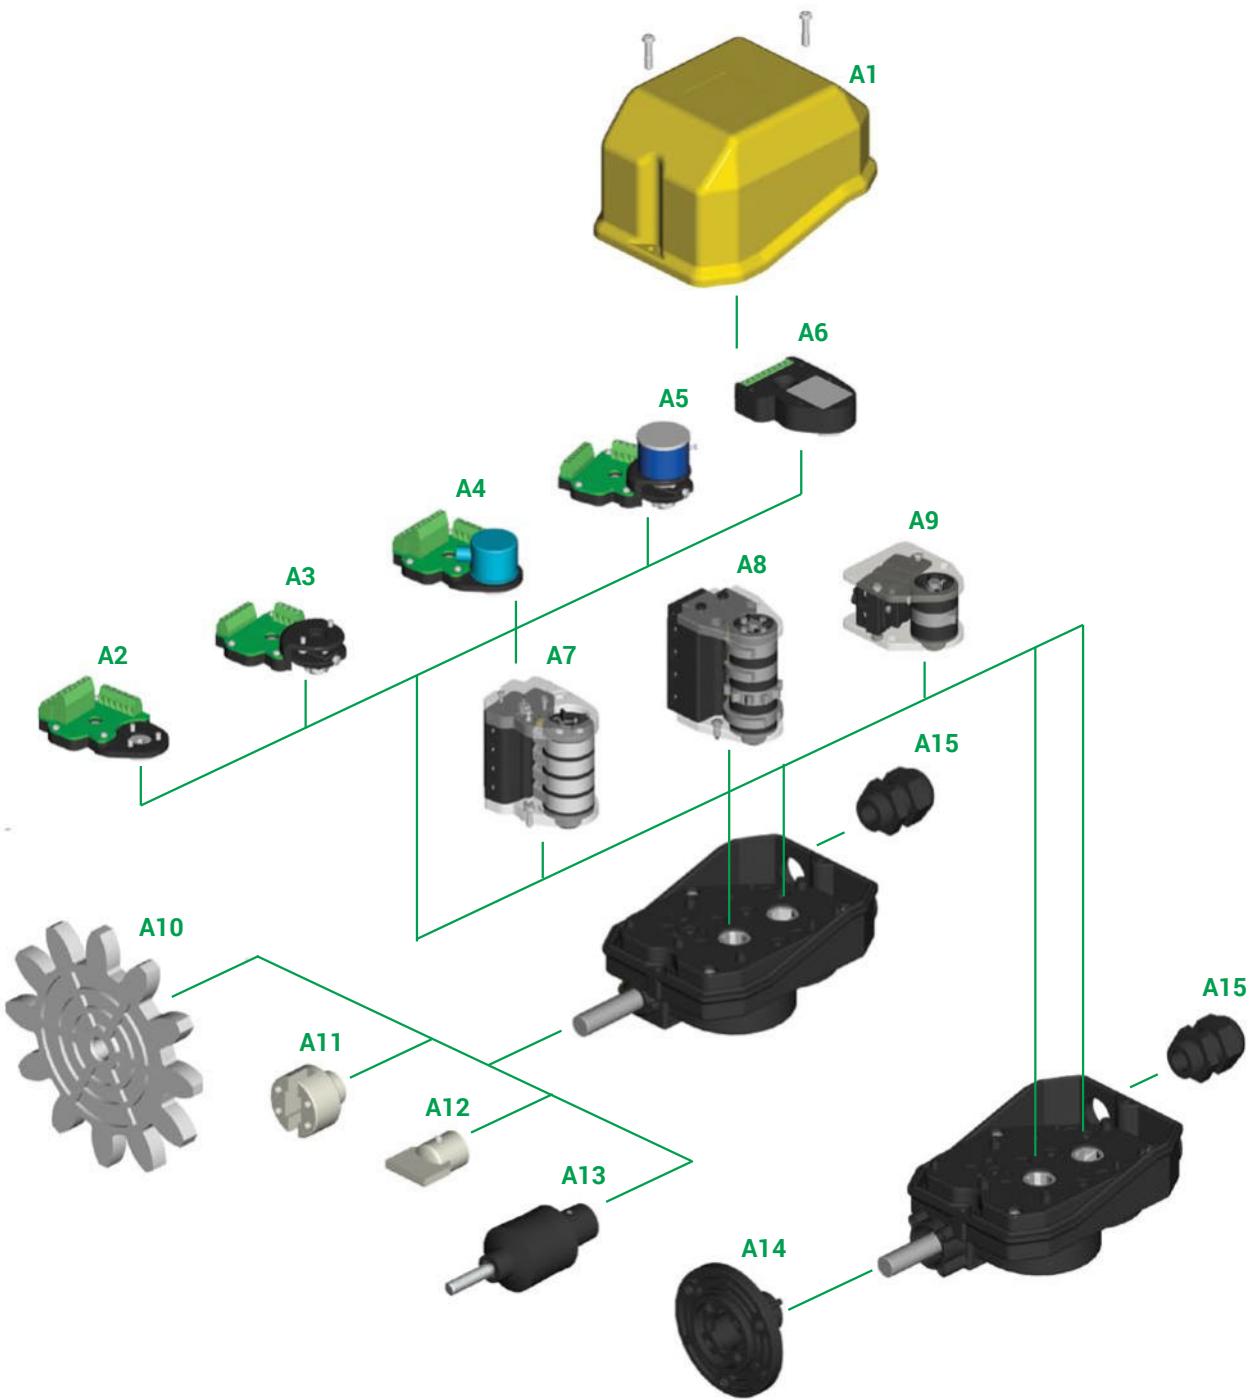

COMPONENTS

Standard cam sets

| Ref. | Drawing | No. and type of cams | No. and type of switches | Code |
|------|---|----------------------|---------------------------|------------|
| A7 |  | 2 cams A | 2 switches PRSL0110XX | FCL20001 |
| | | 2 cams A | 2 switches PRSL0111XX | FCL20002 |
| | | Cams A+C | 2 switches PRSL0110XX | FCL20003 |
| | | Cams A+C | 2 switches PRSL0111XX | FCL20004 |
| | | 2 cams C | 2 switches PRSL0110XX | FCL20005 |
| | | 2 cams C | 2 switches PRSL0111XX | FCL20006 |
| | | Cams D+D+B+F | 4 switches PRSL0110XX | FCL40001 |
| | | Cams D+D+B+F | 4 switches PRSL0111XX | FCL40002 |
| | | 4 cams A | 4 switches PRSL0110XX | FCL40003 |
| | | 4 cams A | 4 switches PRSL0111XX | FCL40004 |
| | | Cams A+A+C+C | 4 switches PRSL0110XX | FCL40005 |
| | | Cams A+A+C+C | 4 switches PRSL0111XX | FCL40006 |
| | | 4 cams C | 4 switches PRSL0110XX | FCL40007 |
| | | 4 cams C | 4 switches PRSL0111XX | FCL40008 |
| | | Cams C+C+C+E | 4 switches PRSL0110XX | FCL40009 |
| | | Cams C+C+C+E | 4 switches PRSL0111XX | FCL40010 |
| | | Cams A+A+E+E | 4 switches PRSL0110XX | FCL40011 |
| | | Cams A+A+E+E | 4 switches PRSL0111XX | FCL40012 |
| A8 |  | 2 cams A | 2 switches PRSL0036XX | PRFC0010PE |
| | | 2 cams A | 2 switches PRSL0037XX | PRFC0011PE |
| | | 2 cams C | 2 switches PRSL0036XX | PRFC0012PE |
| | | 2 cams C | 2 switches PRSL0037XX | PRFC0013PE |
| | | 3 cams A | 3 switches PRSL0036XX | PRFC0020PE |
| | | 3 cams A | 3 switches PRSL0037XX | PRFC0021PE |
| | | 3 cams C | 3 switches PRSL0036XX | PRFC0022PE |
| | | 3 cams C | 3 switches PRSL0037XX | PRFC0024PE |
| | | 4 cams A | 4 switches PRSL0036XX | PRFC0030PE |
| | | 4 cams A | 4 switches PRSL0037XX | PRFC0031PE |
| | | 4 cams C | 4 switches PRSL0036XX | PRFC0032PE |
| | | 4 cams C | 4 switches PRSL0037XX | PRFC0034PE |
| A9 |  | 1 cam A | 1 interruttore PRSL0455PI | PRFC0101PE |
| | | 2 cam A | 2 switches PRSL0455PI | PRFC0103PE |

Other sets with 2/3/4 switches PRSL0036XX/PRSL0037XX/PRSL0110XX/PRSL0111XX or with 1 or 2 switches PRSL0455PI are available on request.

Cam reference chart for sets with switches PRSL0110XX and PRSL0111XX

| Cam | | Code | Switching angle with PRSL0110XX | Switching angle with PRSL0111XX |
|-----|--|-------------|---------------------------------|---------------------------------|
| A | | 1 point | PRSL7194PI | 21,5° ±0,5° |
| B | | 10 points | PRSL7193PI | 21,5° ±0,5° |
| C | | 60° sector | PRSL7195PI | 82,0° ±0,5° |
| D | | 72° sector | PRSL7196PI | 94,0° ±0,5° |
| E | | 180° sector | PRSL7191PI | 204,5° ±0,5° |
| F | | 305° sector | PRSL7192PI | 328,5° ±0,5° |

Cam reference chart for sets with switches PRSL0036XX, PRSL0037XX and PRSL0455PI

| Cam | | Code | Switching angle with PRSL0036XX | Switching angle with PRSL0037XX |
|-----|--|-------------|---------------------------------|---------------------------------|
| A | | 1 point | PRSL7140PI | 21,0° ±0,5° |
| B | | 10 points | PRSL7142PI | 16,5° ±0,5° |
| C | | 60° sector | PRSL7141PI | 80,0° ±0,5° |
| E | | 180° sector | PRSL7144PI | 199,5° ±0,5° |
| H | | 335° sector | PRSL7143PI | 343,5° ±0,5° |


Potentiometers, encoders and sensors

| Ref. | Drawing | Description | Code |
|------|---------|--|----------|
| A2 | | Support for encoder | PA030000 |
| A3 | | Support for potentiometer | PA020000 |
| A4 | | Encoder 36 pulses./rev. with support | PA030001 |
| | | Encoder 150 pulses./rev. with support | PA030002 |
| A5 | | Potentiometer 10 kΩ with support | PA020001 |
| | | Potentiometer 10 kΩ mechanical stop with support | PA020002 |
| | | Potentiometer 10 kΩ ±10% 4 pins with support | PA020003 |
| | | Potentiometer 10 kΩ ±10% 3 pins with support | PA020004 |
| | | Potentiometer 5 kΩ ±10% with support | PA020005 |
| | | Potentiometer 4.7 kΩ with support | PA020006 |
| | | Potentiometer 10 kΩ with support | PA020007 |
| | | Potentiometer 2.2 kΩ with support | PA020008 |
| | | Potentiometer 2KΩ with support | PA020009 |


Potentiometers, encoders and sensors

| | | | |
|----|---|--|---------------------|
| A6 |  | Absolute encoder Yankee - current output | PA01AA01 / PA02AA01 |
| | | Absolute encoder Yankee - voltage output | PA01AB01 |
| | | Absolute encoder Yankee - PWM output | PA01AC01 |

Accessories

| Ref. | Drawing | Description | Code |
|------|---|------------------------------|------------------------|
| A1 |  | Cover with tightening rubber | SL000096 |
| A10 |  | Pinion gear | See pinion gear tables |
| A11 |  | Female coupling with pin | PRSL0920PI |
| A12 |  | Male coupling with pin | PRSL0919PI |
| A13 |  | Coupling with pin | PRSL0981PI |
| A14 |  | Flange with pin | PRSL0947PI |
| A15 |  | Cable gland M20 | PRPS0064PE |

Moulded pinion gears

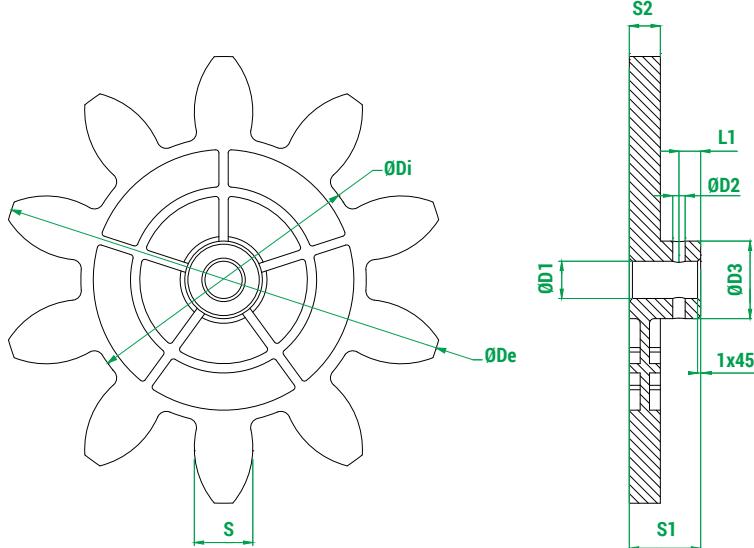

Legend

Z Number of teeth

M Module

D_p Primitive diameter

D_e External diameter

D_i Internal diameter

a Addendum



d Dedendum

Alpha Pressure angle

| Code | Z | M | D _p | D _e | D _i | a | d | S | Alpha | D ₁ | D ₂ | D ₃ | S ₁ | S ₂ | L ₁ |
|------------|----|-------|----------------|----------------|----------------|-------|-------|-------|-------|----------------|----------------|----------------|----------------|----------------|----------------|
| PRSL0915PI | 8 | 20.00 | 160.00 | 200.00 | 113.20 | 20.00 | 23.40 | 31.41 | 20.00 | 12.00 | 4.00 | 24.00 | 23.00 | 10.00 | 7.00 |
| PRSL0912PI | 10 | 12.00 | 120.00 | 144.00 | 92.00 | 12.00 | 14.00 | 18.85 | 20.00 | 12.00 | 4.00 | 25.00 | 23.00 | 10.00 | 7.00 |
| PRSL0913PI | 10 | 14.00 | 140.00 | 168.00 | 107.24 | 14.00 | 16.38 | 21.99 | 20.00 | 12.00 | 4.00 | 24.60 | 23.00 | 10.00 | 7.00 |
| PRSL0914PI | 10 | 16.00 | 160.00 | 192.00 | 122.67 | 16.00 | 18.67 | 25.13 | 20.00 | 12.00 | 4.00 | 24.00 | 23.00 | 10.00 | 7.00 |
| PRSL0917PI | 11 | 6.00 | 66.00 | 78.00 | 51.96 | 6.00 | 7.02 | 9.42 | 20.00 | 12.00 | 4.00 | 19.00 | 23.00 | 8.00 | 7.00 |
| PRSL0916PI | 12 | 5.00 | 60.00 | 70.00 | 48.30 | 5.00 | 5.83 | 7.85 | 20.00 | 12.00 | 4.00 | 20.00 | 23.00 | 8.00 | 7.00 |
| PRSL0918PI | 12 | 8.00 | 96.00 | 112.00 | 77.28 | 8.00 | 9.36 | 12.56 | 20.00 | 12.00 | 3.90 | 21.50 | 23.50 | 10.00 | 7.00 |
| PRSL0911PI | 12 | 10.00 | 120.00 | 140.00 | 96.67 | 10.00 | 11.67 | 15.71 | 20.00 | 12.00 | 4.00 | 25.00 | 23.50 | 10.00 | 7.00 |
| PRSL0944PI | 12 | 12.00 | 144.00 | 168.00 | 116.00 | 12.00 | 14.00 | 18.85 | 20.00 | 12.00 | 4.00 | 24.00 | 23.00 | 10.00 | 7.00 |

Measuring unit: mm.

Waterjet cut pinion gears

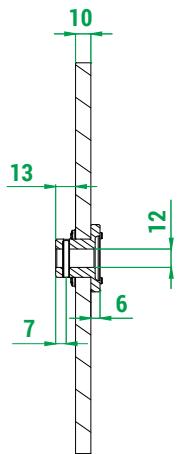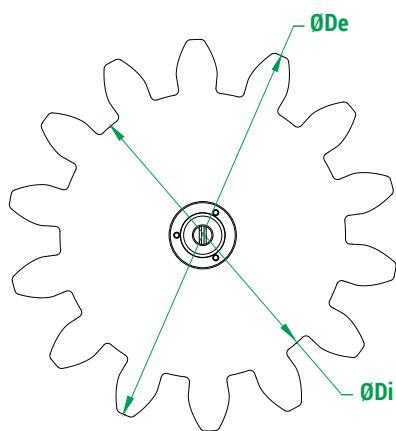

Legend

| | |
|----------------|--------------------|
| Z | Number of teeth |
| M | Module |
| D _p | Primitive diameter |
| D _e | External diameter |
| D _i | Internal diameter |
| a | Addendum |
| d | Dedendum |
| Alpha | Pressure angle |

| Code | Z | M | D _p | D _e | D _i | a | d | Alpha |
|------------|----|-------|----------------|----------------|----------------|-------|-------|-------|
| PRSL0857PI | 8 | 18.00 | 144.00 | 180.00 | 102.00 | 18.00 | 21.00 | 20.00 |
| PRSL0855PI | 8 | 24.00 | 192.00 | 240.00 | 136.00 | 24.00 | 28.00 | 20.00 |
| PRSL0992PI | 9 | 10.00 | 90.00 | 110.00 | 66.67 | 10.00 | 11.67 | 20.00 |
| PRSL0879PI | 9 | 16.00 | 144.00 | 176.00 | 106.67 | 16.00 | 18.67 | 20.00 |
| PRSL0854PI | 9 | 18.00 | 162.00 | 198.00 | 120.00 | 18.00 | 21.00 | 20.00 |
| PRSL0871PI | 9 | 20.00 | 180.00 | 220.00 | 133.33 | 20.00 | 23.33 | 20.00 |
| PRSL0849PI | 9 | 24.00 | 216.00 | 264.00 | 160.00 | 24.00 | 28.00 | 20.00 |
| PRSL0846PI | 10 | 10.00 | 100.00 | 120.00 | 76.67 | 10.00 | 11.67 | 20.00 |
| PRSL0993PI | 10 | 18.00 | 180.00 | 216.00 | 138.00 | 18.00 | 21.00 | 20.00 |
| PRSL0970PI | 10 | 22.00 | 220.00 | 264.00 | 168.52 | 22.00 | 25.74 | 20.00 |
| PRSL0856PI | 10 | 24.00 | 240.00 | 288.00 | 184.00 | 24.00 | 28.00 | 20.00 |
| PRSL0861PI | 11 | 12.00 | 132.00 | 156.00 | 104.00 | 12.00 | 14.00 | 20.00 |
| PRSL0998PI | 11 | 18.00 | 198.00 | 234.00 | 156.00 | 18.00 | 21.00 | 20.00 |
| PRSL0997PI | 11 | 20.00 | 220.00 | 260.00 | 173.36 | 20.00 | 23.32 | 20.00 |
| PRSL0859PI | 11 | 24.00 | 264.00 | 312.00 | 204.00 | 24.00 | 30.00 | 20.00 |
| PRSL0863PI | 12 | 14.00 | 168.00 | 196.00 | 133.00 | 14.00 | 17.50 | 20.00 |
| PRSL0897PI | 12 | 16.00 | 192.00 | 224.00 | 154.67 | 16.00 | 18.67 | 20.00 |
| PRSL0972PI | 12 | 18.00 | 216.00 | 252.00 | 173.88 | 18.00 | 21.06 | 20.00 |
| PRSL0845PI | 12 | 20.00 | 240.00 | 280.00 | 193.34 | 20.00 | 23.32 | 20.00 |
| PRSL0878PI | 12 | 24.00 | 288.00 | 336.00 | 232.00 | 24.00 | 28.00 | 20.00 |
| PRSL0860PI | 13 | 6.00 | 78.00 | 90.00 | 63.00 | 6.00 | 7.50 | 20.00 |
| PRSL0853PI | 13 | 12.00 | 156.00 | 178.59 | 126.00 | 11.29 | 15.00 | 20.00 |
| PRSL0898PI | 13 | 16.00 | 208.00 | 240.00 | 170.67 | 16.00 | 18.66 | 20.00 |
| PRSL0862PI | 14 | 10.00 | 140.00 | 169.00 | 125.00 | 15.00 | 7.50 | 20.00 |
| PRSL0896PI | 14 | 16.00 | 224.00 | 256.00 | 186.67 | 16.00 | 18.67 | 20.00 |
| PRSL0999PI | 14 | 18.00 | 252.00 | 288.00 | 210.00 | 18.00 | 21.00 | 20.00 |
| PRSL0848PI | 14 | 20.00 | 280.00 | 320.00 | 233.33 | 20.00 | 23.33 | 20.00 |
| PRSL0858PI | 15 | 18.00 | 270.00 | 306.00 | 228.00 | 18.00 | 21.00 | 20.00 |
| PRSL0847PI | 16 | 20.00 | 320.00 | 360.00 | 273.33 | 20.00 | 23.33 | 20.00 |
| PRSL0973PI | 17 | 10.00 | 170.00 | 190.00 | 145.00 | 10.00 | 12.50 | 22.89 |
| PRSL0974PI | 17 | 14.00 | 238.00 | 266.00 | 203.00 | 14.00 | 17.50 | 22.89 |
| PRSL0851PI | 20 | 6.00 | 120.00 | 132.00 | 105.00 | 6.00 | 7.50 | 22.89 |

Measuring unit: mm.

GF4C - REQUEST FORM FOR NON STANDARD LIMIT SWITCH


Instructions

(See next pages for list of components and legends)

- 1 Version:** tick the required version.
- 2 Revolution ration:** write the required revolution ratio for each output.
- 3 Standard cam sets:** write the code of the cam set required for each output.
ATTENTION: refer to table "Configurations with sets of cams/switches" for possible configurations.
- 4 Customized cam sets:** for non standard cam sets, fill in the scheme choosing the cams and the switches required.
ATTENTION: refer to table "Configurations with sets of cams/switches" for possible configurations.
Customized cams are available on request.
- 5 Potentiometers, encoders, Yankee:** write the code of the potentiometer, encoder or Yankee required. Refer to table "Configurations with potentiometers, encoders and Yankee" for possible configurations.
- 6 Cable glands:** choose the number of cable glands required.
- 7 Coupling, flange, pinion gear:** tick the box when coupling, flange or pinion gear are required.
When a standard pinion gear is required, write the code number listed in the pinion gear table in the catalogue.
When a special pinion gear is required, write the number of teeth, the module and the primitive diameter.
- 8 Shaft:** tick the shaft type required.
Customized shafts are available on request.

Version **1**

- Version IP 00 (without cover)
- Version IP 65

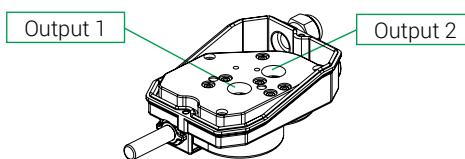


Revolution ratio **2**

- | | |
|---|---|
| Output 1 | Output 2 |
| <input type="checkbox"/> 1:1 <input type="checkbox"/> 1:25 <input type="checkbox"/> 1:200 | 1: <input type="text"/> |
| <input type="checkbox"/> 1:5 <input type="checkbox"/> 1:50 <input type="checkbox"/> 1:250 | Not all revolution ratios are available |
| <input type="checkbox"/> 1:10 <input type="checkbox"/> 1:70 <input type="checkbox"/> 1:300 | |
| <input type="checkbox"/> 1:15 <input type="checkbox"/> 1:100 <input type="checkbox"/> 1:450 | |
| <input type="checkbox"/> 1:20 <input type="checkbox"/> 1:150 <input type="checkbox"/> 1: <input type="text"/> | |

Standard cam sets **3**

- Cam set code
 Output 1
 Output 2

Customized cam sets **4**



| | | |
|----------|----------------------|----------------------|
| Output 1 | Cam code | Switch code |
| 4 | <input type="text"/> | <input type="text"/> |
| 3 | <input type="text"/> | <input type="text"/> |
| 2 | <input type="text"/> | <input type="text"/> |
| 1 | <input type="text"/> | <input type="text"/> |
| Output 2 | Cam code | Switch code |
| 4 | <input type="text"/> | <input type="text"/> |
| 3 | <input type="text"/> | <input type="text"/> |
| 2 | <input type="text"/> | <input type="text"/> |
| 1 | <input type="text"/> | <input type="text"/> |

Potentiometers, encoders, Yankee **5**

Output 1 Output 2
Code

Cable glands **6**

- No. 1 cable gland M20
- No. 2 cable glands M20

Male coupling **7**

- Male coupling
- Female coupling
- Pinion gear

Coupling **7**

- Coupling
- Flange

Pinion gear code

Customized pinion gear


No. of teeth

Module


Primitive diameter

8


Standard shaft



Standard shaft without hole



Flexible shaft



3 Legend - Standard cam sets

| No. & type of switches | No. & type of cams | Code |
|------------------------|--------------------|------------|
| 2 x PRSL0036XX | 2 cams A | PRFC0010PE |
| | 2 cams C | PRFC0012PE |
| 2 x PRSL0037XX | 2 cams A | PRFC0011PE |
| | 2 cams C | PRFC0013PE |
| 3 x PRSL0036XX | 3 cams A | PRFC0020PE |
| | 3 cams C | PRFC0022PE |
| 3 x PRSL0037XX | 3 cams A | PRFC0021PE |
| | 3 cams C | PRFC0024PE |
| 4 x PRSL0036XX | 4 cams A | PRFC0030PE |
| | 4 cams C | PRFC0032PE |
| 4 x PRSL0037XX | 4 cams A | PRFC0031PE |
| | 4 cams C | PRFC0034PE |
| 2 x PRSL0110XX | 2 cams A | FCL20001 |
| | Cams A+C | FCL20003 |
| 4 x PRSL0110XX | 2 cams C | FCL20005 |
| | Cams D+D+B+F | FCL40001 |
| 4 x PRSL0111XX | 4 cams A | FCL40003 |
| | Cams A+A+C+C | FCL40005 |
| 4 x PRSL0111XX | 4 cams C | FCL40007 |
| | Cams C+C+C+E | FCL40009 |
| 4 x PRSL0111XX | Cams A+A+E+E | FCL40011 |
| | 2 cams A | FCL20002 |
| 2 x PRSL0111XX | Cams A+C | FCL20004 |
| | 2 cams C | FCL20006 |
| 4 x PRSL0111XX | Cams D+D+B+F | FCL40002 |
| | 4 cams A | FCL40004 |
| 4 x PRSL0111XX | Cams A+A+C+C | FCL40006 |
| | 4 cams C | FCL40008 |
| 4 x PRSL0111XX | Cams C+C+C+E | FCL40010 |
| | Cams A+A+E+E | FCL40012 |
| 1 x PRSL0455XPI | 1 cam A | PRFC0101PE |
| 2 x PRSL0455XPI | 2 cams A | PRFC0103PE |

7 Legend - Potentiometers, encoders and Yankee

| Description | Code |
|--|---------------------|
| Potentiometer 10 kΩ with support | PA020001 |
| Potentiometer 10 kΩ mechanical stop with support | PA020002 |
| Potentiometer 10 kΩ ±10% 4 pins with support | PA020003 |
| Potentiometer 10 kΩ ±10% 3 pins with support | PA020004 |
| Potentiometer 5 kΩ ±10% with support | PA020005 |
| Potentiometer 4,7 kΩ with support | PA020006 |
| Potentiometer 10 kΩ with support | PA020007 |
| Potentiometer 2,2 kΩ with support | PA020008 |
| Potentiometer 2kΩ with support | PA020009 |
| Encoder 36 pulses/rev. with support | PA030001 |
| Encoder 150 pulses/rev. with support | PA030002 |
| Yankee - current output | PA01AA01 / PA02AA01 |
| Yankee - voltage output | PA01AB01 |
| Yankee - PWM output | PA01AC01 |

4 Legend - Switches


Auxiliary control

| PRSL0036XX | PRSL0037XX | PRSL0110XX | PRSL0111XX |
|---|---|---|---|
| 1NO+1NC | 1NC | 1NO+1NC | 1NC |
|  |  |  |  |

Direct control

PRSL0455PI

2NC



4 Legend - Standard cams

| Cam | Code for switches PRSL0036XX, PRSL0037XX, PRFC0455PI | Switching angle with PRSL0036XX | Switching angle with PRSL0037XX | Code for switches PRSL0110XX, PRSL0111XX | Switching angle with PRSL0110XX | Switching angle with PRSL0111XX |
|---|--|---------------------------------|---------------------------------|--|---------------------------------|---------------------------------|
| A  | 1 point | PRSL7140PI | 21,0° ±0,5° | PRSL7194PI | 21,5° ±0,5° | 23,0° ±0,5° |
| B  | 10 points | PRSL7142PI | 16,5° ±0,5° | PRSL7193PI | 21,5° ±0,5° | 23,0° ±0,5° |
| C  | 60° sector | PRSL7141PI | 80,0° ±0,5° | PRSL7195PI | 82,0° ±0,5° | 86,0° ±0,5° |
| D  | 72° sector | / | / | PRSL7196PI | 94,0° ±0,5° | 97,5° ±0,5° |
| E  | 180° sector | PRSL7144PI | 199,5° ±0,5° | PRSL7191PI | 204,5° ±0,5° | 203,0° ±0,5° |
| F  | 305° sector | / | / | PRSL7192PI | 328,5° ±0,5° | 327,0° ±0,5° |
| H  | 335° sector | PRSL7143PI | 343,5° ±0,5° | / | / | / |

4 Table - Configurations with sets of cams/switches

Sets of cams with switches PRSL0036XX and PRSL0037XX

When using sets of cams with switches PRSL0036XX and PRSL0037XX:

- it is possible to mount up to 4 switches on output 2
 - it is possible to mount up to 3 switches on output 1.
- It is possible to mount 4 switches on output 1 only when output 2 is left empty.

Sets of cams with switches PRSL0110XX and PRSL0111XX

When using sets of cams with switches PRSL0110XX and PRSL0111XX, it is possible to mount up to 4 switches on each output.

Sets of cams with switches PRSL0455PI

When using sets of cams with switches PRSL0455PI, it is possible to mount only 1 switch on each output.

It is possible to mount 2 switches on output 1 only when output 2 is left empty.

5 Table - Configurations with potentiometers, encoders and Yankee

With sets of cams/switches PRSL0036XX and PRSL0037XX

When using sets of cams with switches PRSL0036XX and PRSL0037XX, it is possible to mount potentiometers, encoders and Yankee only on the output where there is no set of cams/switches. It is not possible to mount potentiometers, encoders nor Yankee on top of a set of cams/switches.

* Potentiometers marked with * can be mounted on output 1 or on output 2, but the other output must be left empty.

With sets of cams/switches PRSL0110XX and PRSL0111XX

Potentiometers, encoders and Yankee can be mounted on output 1 and 2 alone (No. of switches = 0), or on top of a set of cams with switches PRSL0110XX and PRSL0111XX according to the possible configurations shown in the following table.

* Potentiometers marked with * can be mounted on output 1 or on output 2, but the other output must be left empty.

| Potentiometers, encoders and Yankee | Output 1 | | | | | Output 2 | | | | |
|--|----------|-----|-----|----|----|----------|-----|-----|----|----|
| | 0 | 1 | 2 | 3 | 4 | 0 | 1 | 2 | 3 | 4 |
| PA020001 | YES | YES | NO | NO | NO | YES | YES | NO | NO | NO |
| PA020002 | YES | YES | NO | NO | NO | YES | YES | NO | NO | NO |
| PA020003 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |
| PA020004 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |
| PA020005 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |
| PA020006* | YES | YES | NO | NO | NO | YES | YES | NO | NO | NO |
| PA020007* | YES | YES | NO | NO | NO | YES | YES | NO | NO | NO |
| PA020008* | YES | YES | NO | NO | NO | YES | YES | NO | NO | NO |
| PA020009* | YES | NO | NO | NO | NO | YES | NO | NO | NO | NO |
| PA030001 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |
| PA030002 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |
| PA01AA01 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |
| PA01AB01 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |
| PA01AC01 | YES | YES | YES | NO | NO | YES | YES | YES | NO | NO |