


CONNECTION PIN-OUT

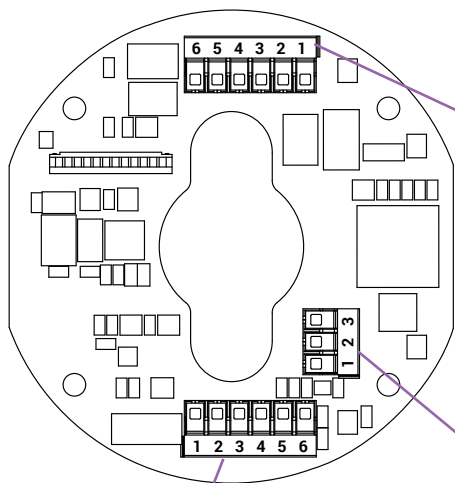

POS	Relays	Description
1	Relay 1	NO
2	Relay 1	COM
3	Relay 1	NC
4	Relay 2	NO
5	Relay 2	COM
6	Relay 2	NC

POS	Relays	Description
1	Relay 3	NO
2	Relay 3	COM
3	Relay 3	NC
4	Relay 4	NO
5	Relay 4	COM
6	Relay 4	NC

POS	Description
1	12...30 Vdc
2	I OUT 4...20 mA
3	GND - 0 V

PANDIA - REQUEST FORM FOR CABLE TRANSDUCER

Instructions

- 1 Interface:** tick the box corresponding to the type of interface required.
- 2 Wire measuring range:** tick the box corresponding to the wire measuring range required..
- 3 Hooking ring:** tick the box corresponding to the diameter required for the wire hooking ring.

- Interface** 1
- Analog 4...20 mA with 4 relays (output with cable gland)
 - Analog 4...20 mA without relays (output with connector)
 - Digital CAN-bus (output with connector)

ATTENTION: on request, the following interfaces are also available:
 - 4...20 mA redundant analog
 - CAN-bus redundant digital
 Contact our Sales Department for further information.

Wire measuring range 2

- 3000 mm
- 5000 mm

Wire hooking ring diameter 3

- 10 mm
- 15 mm

Remarks
