




# SPA EXPLOSION PROOF HAZARDOUS AREAS Pendant control station

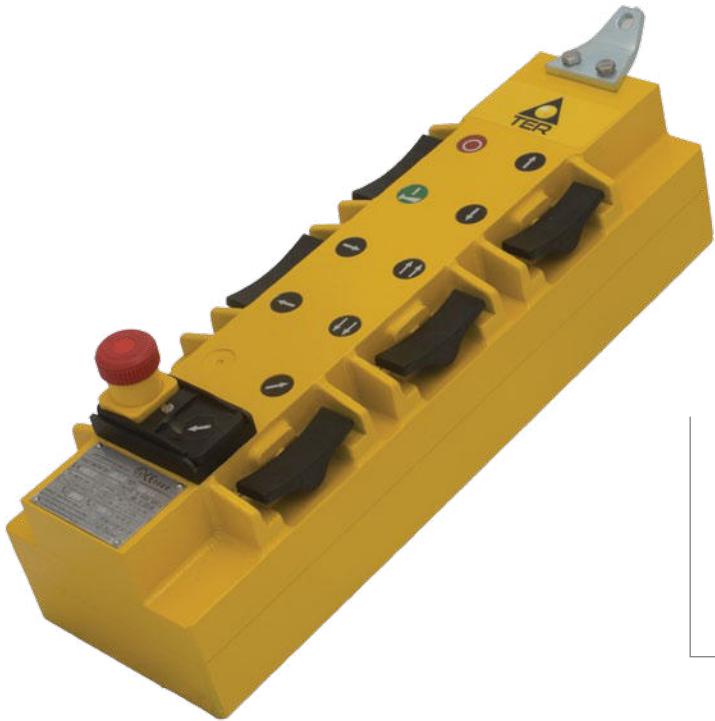

Explosion proof pendant station for auxiliary control. Sturdy and reliable, SPA Explosion Proof is designed for heavy industry in potentially explosive areas.

## FEATURES

- Enclosure with actuators placed on a double row to enable grouping of a large number of functions in a single unit.
- The emergency stop mushroom pushbutton complies with standard ISO 13850.
- Mechanical life of switches: 1 million operations.
- IP protection degree: SPA Explosion Proof is classified IP 65 / IP 66.
- Extreme temperature resistance: -20°C to +55°C.
- Solid but light weight enclosure made of aluminum, or stainless steel AISI 316 or chrome-plated cast-iron (optional versions), resistant to temperature changes and corrosive environments.

## OPTIONS

- Available in configurations with 2 to 12 actuators, arranged on a double row.
- 1 or 2 speed switches with NO or NC contacts.
- Mechanical interlock to prevent simultaneous operation of opposite functions.

## CERTIFICATIONS

- CE marking.
- Atex certification EN 60079-0: 2012+A1: 2013, EN 60079-1 Ed.7: 2014, EN 60079-31:2014.
- Conformity to Standards IECEx IEC 60079-0: 2011, IEC 60079-1: 2014, IEC 60079-31: 2014.

*Fill in the "request form" for accurate product configuration.*




## CERTIFICATIONS

	EN 60079-0:2012 + A1:2013 Explosive atmospheres - Equipment - General requirements
Conformity to Atex Standards	EN 60079-1 Ed.7 :2014 Explosive atmospheres - Equipment protection by flameproof enclosures 'd' EN 60079-31:2014 Explosive atmospheres - Equipment dust ignition protection by enclosure "t" IEC 60079-0:2011 Explosive atmospheres - Equipment - General requirements
Conformity to IECEx Standards	IEC 60079-1:2014 Explosive atmospheres - Equipment protection by flameproof enclosures 'd' IEC 60079-31:2014: Explosive atmospheres - Equipment dust ignition protection by enclosure "t"
Atex Certification	INERIS 12ATEX0085X
IECEx Certification	IECEx INE 12.0059X
Type of protection	Ex d IIIB/IIC T6 Gb Ex tb IIIC T85°C Db IP66
	2014/34/EU (ATEX)
Conformity to Community Directives	2014/30/EU Electromagnetic Compatibility 2006/42/CE Machinery Directive 2014/35/EU Low Voltage Directive
Markings and homologations	CE 0080 Ex II 2 G II 2 D IEC IECEx

## GENERAL TECHNICAL SPECIFICATIONS


Operational ambient temperature	-20°C/+55°C
IP protection degree	IP 65 / IP 66
Operating positions	Any position

## TECHNICAL SPECIFICATIONS OF THE SWITCHES


Code	PRSL0075XX	PRSL0076XX	PRSL0090XX
Utilisation category		AC 15	
Rated operational current		1.9 A	
Rated operational voltage		380 Vac	
Rated thermal current		10 A	
Rated insulation voltage		500 Vac	
Mechanical life		1x10 <sup>6</sup> operations	
Switch type	2 speed switch + 2 speed switch	1 speed switch + 1 speed switch	1 speed switch + 2 speed switch
Contacts	1NC+1NO+1NO 1NC+1NO+1NO	1NC+1NO 2NC+2NO	2NC+2NO 1NC+1NO+1NO
Scheme			
Markings and homologations	CE	CE cULus	CE

## OVERALL DIMENSIONS (mm)

2 - 8 actuators

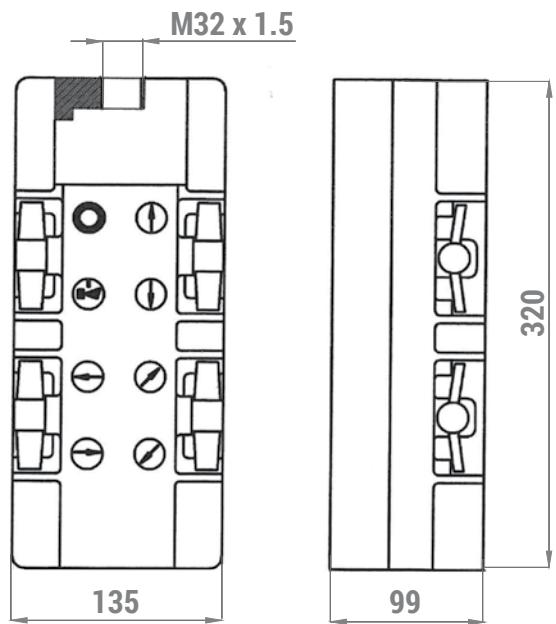

10 - 12 actuators

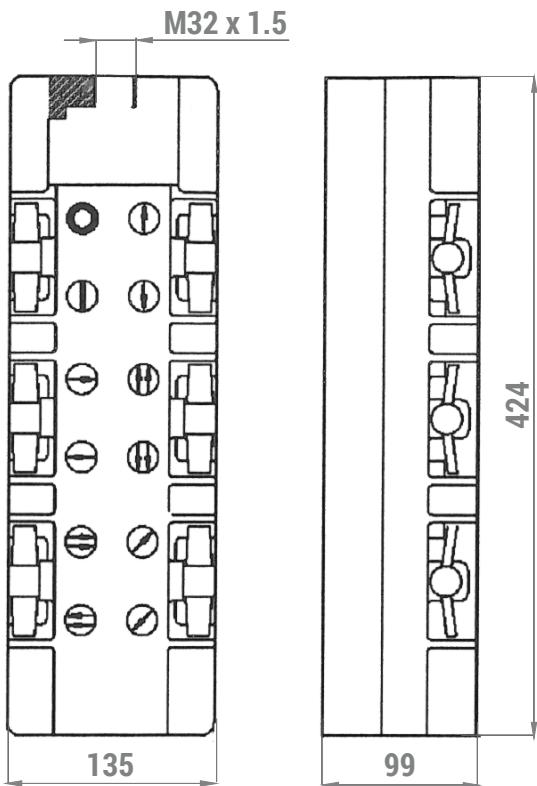

## SPA EXPLOSION PROOF - REQUEST FORM FOR CONTROL STATION

**Instructions**

Fill in the chart to the left according to the number of control elements required (2, 4, 6, 8, 10 or 12 actuators).

- 1 Protection:** tick the box corresponding to the type of protection required.
- 2 Control elements:** enter in the broken-line box the number corresponding to the control element required (1 to 13). If you choose **buttons with arrows**, enter the direction of the arrow into the corresponding box. Eg. ↗ ATTENTION: buttons with opposite functions (eg.: up/down) must be vertically coupled in columns. When mounting **mushroom pushbuttons** or **selector switches**, the corresponding rocker button is disabled. Depending on the functions of the control elements chosen, either 1 speed or 2 speed **switches** will be used.
- 3 Options:** tick the box corresponding to the options you may require.


**1 Protection**

- Ex II 2 G II 2 D  
 Ex d IIB T6 Gb  
 Ex tb IIIC T85°C Db IP 65 / IP 66  
 Enclosure group II B
- Ex II 2 G II 2 D  
 Ex d IIC T6 Gb  
 Ex tb IIIC T85°C Db IP 65 / IP 66  
 Enclosure group II C



**2 Control elements**

ATTENTION: depending on the functions of the control elements chosen, either 1 speed or 2 speed **switches** will be used.


- 1 Emergency stop mushroom pushbutton  
 2 Selector switch - 2 maintained positions 0/1  
 3 Selector switch - 3 maintained positions 0/1/2  
 4 Key selector switch - 2 maintained positions 0/1

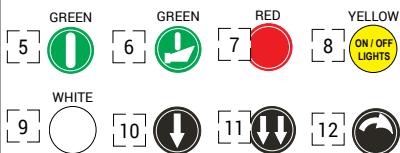**1 speed buttons****2 speed buttons****3 Options**

- Enclosure in stainless steel AISI 316  
 Enclosure in chrome-plated cast-iron  
 Operational ambient temperature -50° C/+55°C

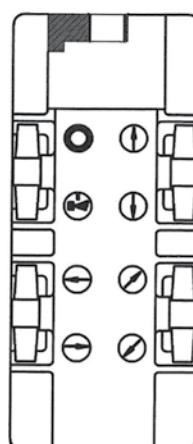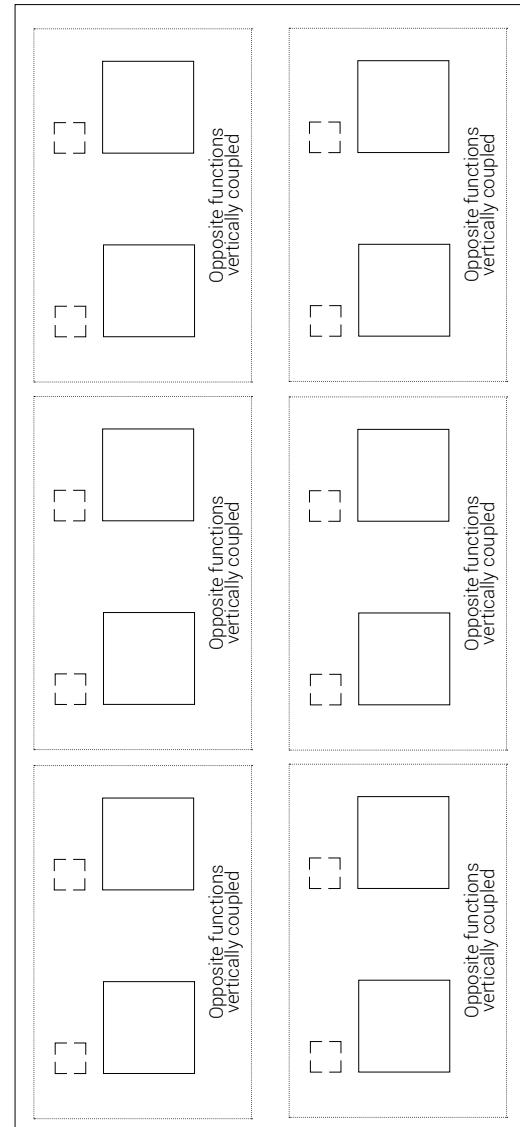

2-8 actuators

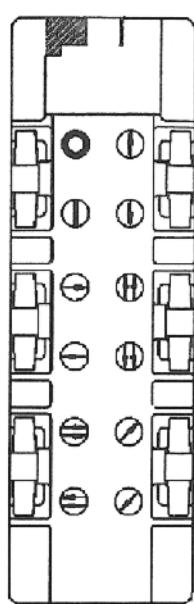

10-12 actuators